

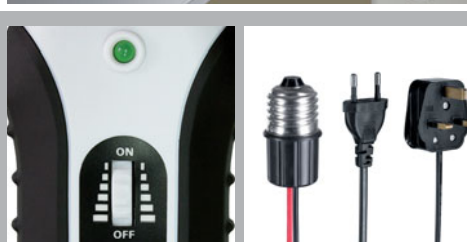
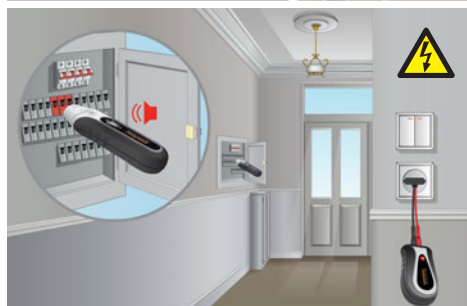


## AC-Tracer

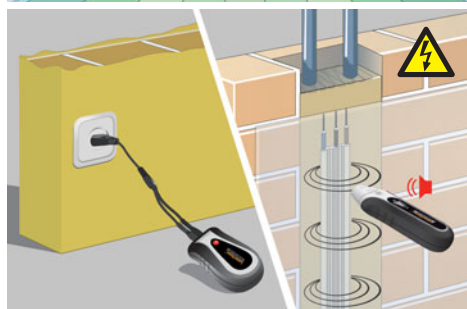

Cable tracer set with transmitter and receiver

Rev.0211

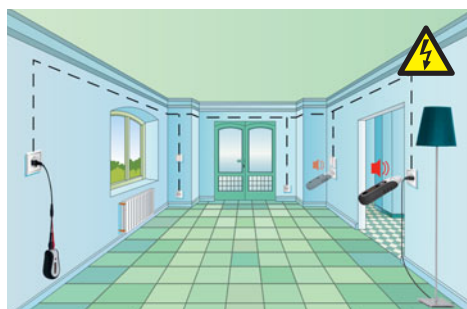

Adjustable sensitivity

Various connection options

- **Non-contact tracing of the transmission signal** by the receiver
- **Fast tracing of coherent electrical circuits**
- **Location of lines** in coherent, live electrical circuits
- **Detection of fuse circuits** in live installations
- Receiver with audible signal tone for locating measured objects
- Transmitter power supply directly from power cable to be tested = **measurement under operating conditions**
- Receiver with adjustable sensitivity for optimum fine adjustment
- Socket adapter for direct and fast testing in building installations
- E27 lamp adapter for direct and fast testing in lamp circuits

### TECHNICAL DATA

#### TRANSMITTER AC-TRACER TX

##### POWER SUPPLY

200-240V AC, 50-60 Hz

##### OVERVOLTAGE CATEGORY

CAT III 300V, pollution degree 2

##### DIMENSIONS (W x H x D)

50 x 80 x 32 mm

##### WEIGHT

54 g

#### RECEIVER AC-TRACER RECV

##### MEASURING RANGE

0...5 cm measuring depth

##### POWER SUPPLY

1 x 9V block, IEC LR6, Alkali

##### DIMENSIONS (W x H x D)

68 x 165 x 36 mm

##### WEIGHT (incl. battery)

155 g



#### AC-Tracer

- including carrying case
- + transmitter TX
- + receiver RECV
- + Euro connector
- + UK plug
- + E 27 Lamp adapter
- + battery

#### Packing dimension (W x H x D)

330 x 210 x 70 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
AC-Tracer	083.050A	4 021563 672103	5