


# Laserliner®

## AC-tiveMaster Digital




### Digital voltage and continuity tester with bar graph and numerical measured value display

Rev. 0212

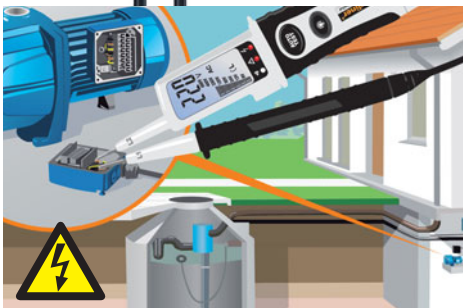

- **Reliable and fast voltage tester** with the most commonly used nominal voltages
- **Automatic AC voltage and DC voltage test**
- **Automatic range and function changeover** for direct testing and measurement
- **Single-phase and rotary field test** with phase sequence display
- **Single-pole phase testing**
- **Automatic continuity tester** with acoustic signal
- **CAT III - 1000 V** – can be used for measurements throughout building installations
- **Safety self-test** (AC warning) as from 50 V, operates in emergency mode without battery
- **Super-bright LED lighting** for integrated test point illumination
- **Rugged, practical enclosure** with lockable test prod spacing (for standard EU connector)

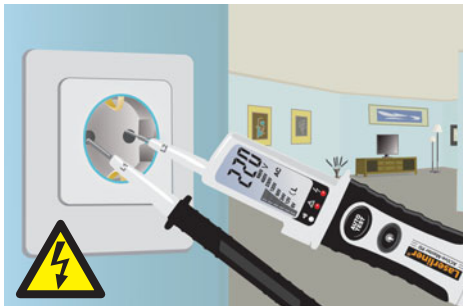

Auto-test function

Large LC display

#### TECHNICAL DATA

<b>LC-DISPLAY / RESOLUTIE</b> 3,5 posities, 1999 digits / 1 V AC/DC (numerical display)
<b>VOLTAGE RANGE</b> 6, 12, 24, 50, 120, 230, 400, 690 V AC/DC
<b>VOLTAGE DETECTION</b> Automatic
<b>PEAK CURRENT (AC/DC)</b> <=(3mA/2.5mA)
<b>FREQUENCY RANGE</b> 50/60 Hz
<b>SINGLE-POLE PHASE TEST</b> Voltage range 100...690 V AC (50/60 Hz)
<b>CONTINUITY TEST</b> Resistance range < 300 kΩ Test current < 5µA Overvoltage protection 690 V AC/DC
<b>ROTARY FIELD DIRECTION INDICATOR</b> Voltage range (LEDs) 100...400 V Frequency range 50/60 Hz
<b>OVERVOLTAGE CATEGORY</b> CAT II 1000 V with protective cover: CAT III - 1000 V / CA T IV 600 V
<b>TYPE OF PROTECTION</b> IP 64
<b>POWER SUPPLY</b> 2 x 1.5 Type AAA, LR03, alkaline
<b>OPERATING TEMPERATURE</b> -10 °C ... 55 °C
<b>WEIGHT</b> 230 g



**AC-tiveMaster Digital**  
+ batteries (2 x 1.5V AAA)  
+ protective covers

**Package size** (W x H x D)  
90 x 315 x 55 mm

ARTICLE	ARTICLE NO.	EAN CODE	PU
AC-tiveMaster Digital	083.025A	4 021563 679836	2

