

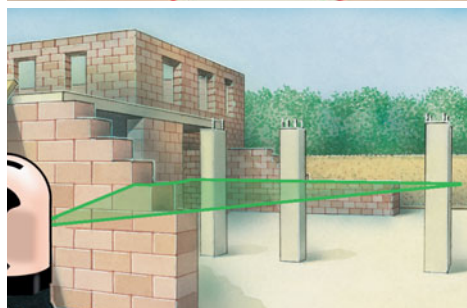


CombiCross-Laser 5

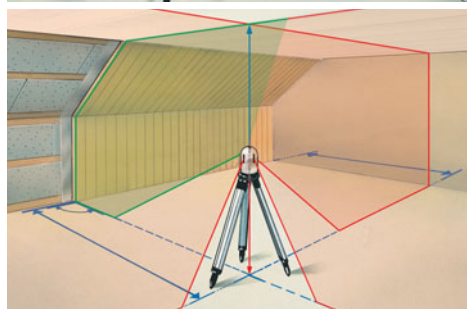

Green cross-line laser with 3 additional red laser lines and plumb laser

Rev.0113

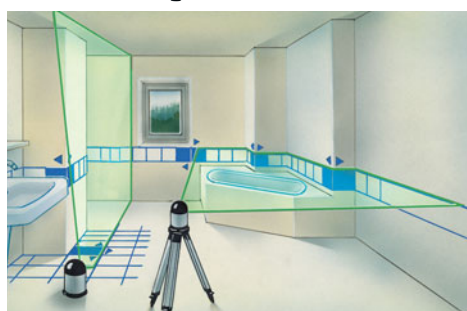

Stable metal base with vernier adjustment




Illuminated vial for pre-adjustment

- **Green laser technology:** because of the physiology of the human eye, green lasers are more visible than red lasers by an order of magnitudes. This makes these lasers easily visible over longer distances and in bright ambient light.
- **PowerBright-Laser:** Special high-performance laser diodes project extremely visible laser lines.
- The **4 vertical lines** are aligned at right angles to one another.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Connectible** laser lines.
- **RX-/GRX-Ready:** Together with an optional laser receiver, the integrated hand-held receiver modes permit detection of the red laser lines (RX-Ready) and green laser lines (GRX-Ready) over long distances and under unfavourable light conditions.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Illuminated vial** and **height-adjustable feet** for preliminary adjustment of the unit.
- **Mains operation** possible using additional mains unit.
- **Transport lock:** A pendulum lock protects unit during transport.

TECHNICAL DATA

ACCURACY	2 mm per 10 m
SELF-LEVELLING RANGE	± 2°
LEVELLING	automatic
LASER RECEPTION RANGE (optional)	max. 30 m radius max. 50 m radius
LASER WAVELENGTH	line lasers red 635 nm line lasers green 532 nm plumb laser red 650 nm
LASERCLASS	2M / < 5 mW
POWER SUPPLY	3 x 1,5V AA, approx. 1,5 hrs operating time
WORKING TEMPERATURE	0°C ... +35°C
STORAGE TEMPERATURE	-10°C ... +60°C
WEIGHT	incl. batteries 1.3 kg
DIMENSIONS (W x H x D)	130 x 200 x 135 mm

1H 4V 1D



CombiCross-Laser 5

including carrying case
+ tripod adapter
+ quick charger
+ high-performance rechargeable batteries (NiMH)

Packing dimension (W x H x D)
390 x 275 x 230 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
CombiCross-Laser 5	057.100A	4 021563 682263	1

