


Flexi3D-Camera



2 m
DOF 2,5...9 cm


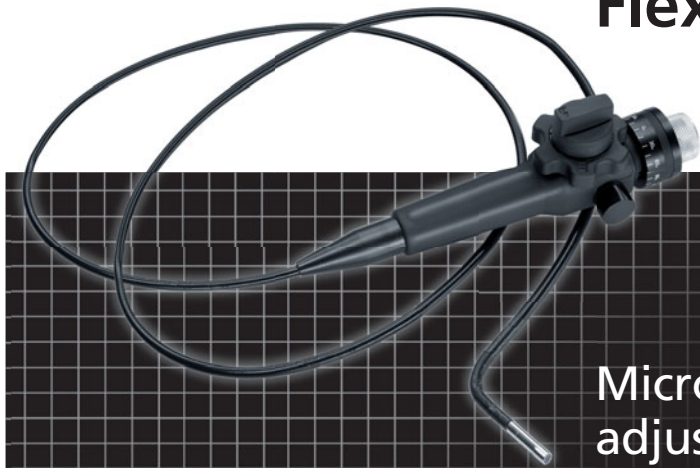


Micro camera with mobile adjustable camera head

Rev.1212



- **Small, flexible camera head (ø 5,5 mm) with a large adjustment range** for easy inspection of front and side areas
- **Twistable cable base with 360° angle scale**, for individualized alignment of the camera head
- **Waterproof camera head and cable**
- Powerful object lighting thanks to **4 high-performance LEDs**
- **Sturdy, durable adjustment mechanism** for a high level of operational safety
- **Diverse range of applications** thanks to the 2 m long camera
- Can be used with the VideoControl-Master base unit **for comprehensive analysis**

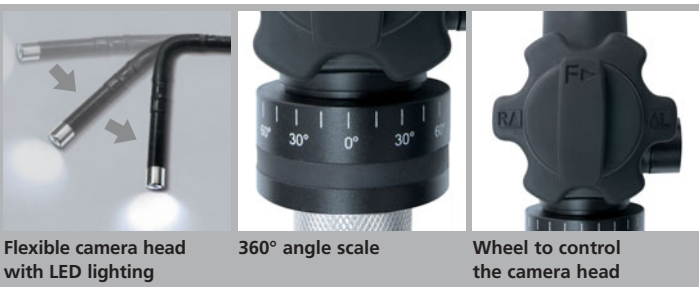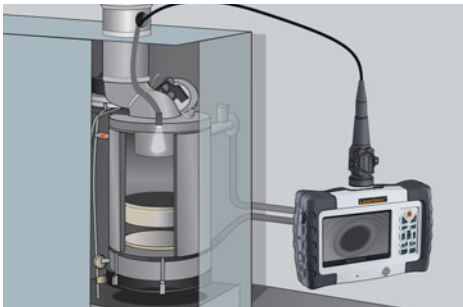

Flexible camera head with LED lighting

360° angle scale

Wheel to control the camera head

ARTICLE	ARTICLE NO.	EAN CODE	PU
Flexi3D-Camera	084.160L	4 021563 684991	1

CAMERA 640 x 480 pixel LED LIGHT IP 67

TECHNICAL DATA

TYPE OF CAMERA	CMOS image sensor
CAMERA HEAD	ø 5,5 mm, water-resistant
PROTECTION CLASS	IP 67 (immersion depth 1 m, 30 min.)
CAMERA RESOLUTION	640 x 480 pixels
FIELD OF VISION	65°
FOCAL DEPTH	2,5 ... 9 cm
CABLE DIAMETER	5,5 mm
CABLE LENGTH	2 m
MINIMUM BENDING RADIUS	70 mm
OPERATING TEMPERATURE	-10 ... 60°C
STORAGE TEMPERATURE	-20 ... 70°C
WEIGHT	0,38 kg
DIMENSIONS (W x H x D)	2000 mm x 66 mm x 60 mm

Only for VideoControl-Master.



Flexi3D-Camera

incl. Sortimo® L-BOXX® 136

Packing dimension (W x H x D)
442 x 151 x 357 mm