


## FlexiCamera



**2 m**  
DOF 1,5...5 cm

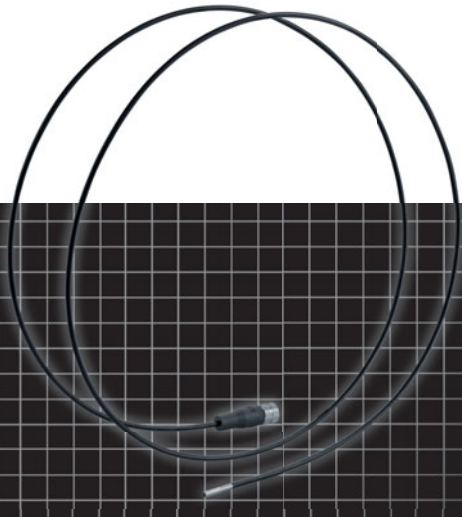

### Universal micro camera with very small camera head

Rev.1212




- **Ideal for hard-to-reach places** thanks to the very small camera head (ø 4 mm) made of stainless steel
- **Waterproof camera head and cable**
- Powerful object lighting thanks to **4 high-performance LEDs**
- **Diverse range of applications** thanks to the 2 m long camera
- Can be used with the VideoControl-Master base unit **for comprehensive analysis**



#### With accessories MicroTopGuide, MicroTopMagnet, MicroTop-90°

- Guide bullet, magnet and mirror attachment for the micro camera head
- Suitable for 4 mm camera head
- Easy to attach and remove

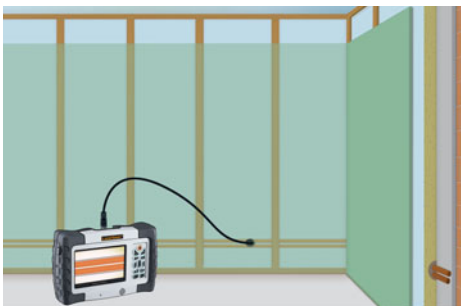

**Only for VideoControl-Master.**



Camera head (ø 4 mm) with LED lighting

Accessories MicroTopGuide, MicroTopMagnet, MicroTop-90°

ARTICLE	ARTICLE NO.	EAN CODE	PU
FlexiCamera	084.150L	4 021563 684557	1

CAMERA 320 x 240 pixel LED LIGHT IP 67

TECHNICAL DATA	
TYPE OF CAMERA	CMOS image sensor
CAMERA HEAD	ø 4 mm, water-resistant
PROTECTION CLASS	IP 67 (immersion depth 2 m, 30 min)
CAMERA RESOLUTION	320 x 240 pixels
FIELD OF VISION	56°
FOCAL DEPTH	1,5 ... 5 cm
CABLE DIAMETER	4 mm
CABLE LENGTH	2 m
MINIMUM BENDING RADIUS	70 mm
OPERATING TEMPERATURE	-10 ... 60°C
STORAGE TEMPERATURE	-20 ... 70°C
WEIGHT	87 g
DIMENSIONS (W x H x D)	2000 mm x 15 mm x 15 mm



#### FlexiCamera

incl. Sortimo® L-BOXX® 136  
+ MicroTopGuide  
+ MicroTopMagnet  
+ MicroTop-90°

**Packing dimension (W x H x D)**  
442 x 151 x 357 mm