




# Laserliner®

## PowerCross-Laser 5



Robust cross-line laser with 5 ultra bright laser lines and plumb function

Rev.0113

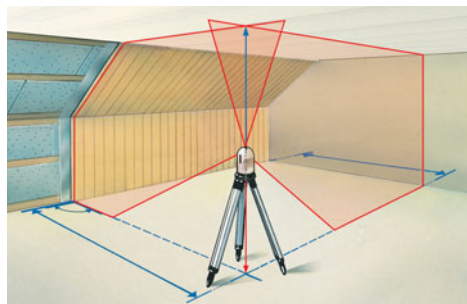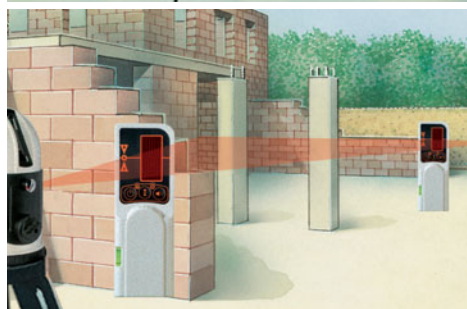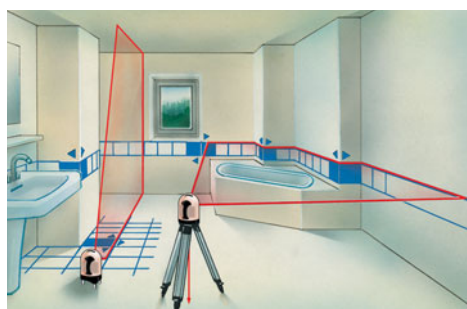


- **PowerBright-Laser++:** Laser diodes of the highest performance class produce extremely bright laser lines. They remain visible even on surfaces at great distances or on dark surfaces as well as under bright ambient light conditions.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **4 vertical lines** are aligned at right angles to one another.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Individually switchable** laser lines.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX 51 up to a max. of 50 m radius – ideal for all interior and exterior applications.
- Long-lasting, powerful **rechargeable lithium-ion battery** with USB charger function.
- The pivoted housing can be turned with a **vernier adjustment mechanism and horizontal circle** to permit exact positioning of laser lines.
- **Vial and height-adjustable feet** for preliminary adjustment of the unit.
- **Transport lock:** A pendulum lock protects unit during transport.

### TECHNICAL DATA

<b>ACCURACY</b>	1,5 mm per 10 m
<b>SELF-LEVELLING RANGE</b>	± 2°
<b>LEVELLING</b>	automatic
<b>LASER WAVELENGTH</b>	line lasers 635 nm / plumb laser 650 nm
<b>LASER</b>	line lasers, class 2M / < 5 mW plumb laser, class 2 / ≤ 1 mW
<b>POWER SUPPLY</b>	rechargeable lithium-ion battery, approx. 17 hrs operating time
<b>WORKING TEMPERATURE</b>	0°C ... +50°C
<b>STORAGE TEMPERATURE</b>	-10°C ... +70°C
<b>WATER AND DUST PROTECTION</b>	IP 54
<b>WEIGHT</b>	1,5 kg
<b>DIMENSIONS (W x H x D)</b>	130 x 200 x 135 mm

1H 4V 1D



### PowerCross-Laser 5

- including Sortimo® L-BOXX® 136
- + tripod adapter
- + Power supply / battery charger
- + laser enhancement glasses
- + rubber caps
- + rechargeable lithium-ion battery



**Packing dimension (W x H x D)**  
442 x 151 x 357 mm



Stable metal base with vernier adjustment

Freely rotatable horizontal circle

Removable lithium battery pack with charger function.

ARTICLE	ARTICLE NO	EAN-CODE	PU
PowerCross-Laser 5	032.050L	4 021563 685233	1

