

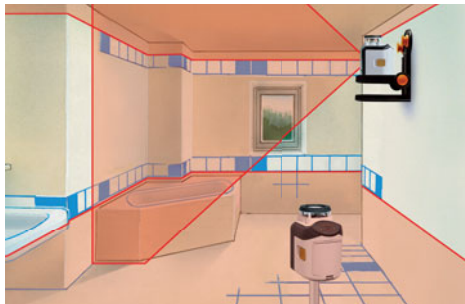


SmartLine-Laser 360°

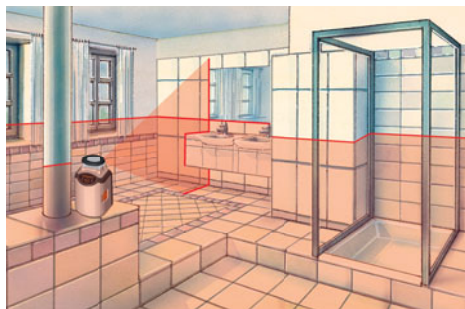

Automatic laser with horizontal 360° laser circle, vertical line and slope function.


Rev. 0613

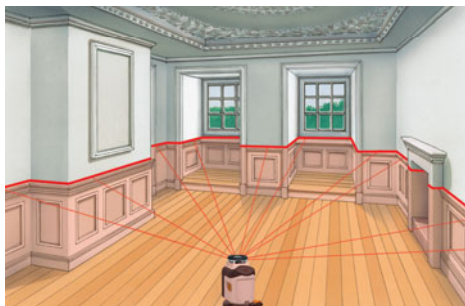

- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **horizontal laser line** produces a continuous 360° laser line, the **vertical laser line** is oriented at right angles thereto. Ideal for almost any alignment job.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 30 m radius – ideal for all interior and exterior applications.
- **Individually switchable** laser lines.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **Additional slope mode** to align angled surfaces.
- **Transport lock:** a pendulum lock protects unit during transport.
- **Multi-functional tripod-/wall mount:** height-adjustable with 1/4" and 5/8" tripod threads, special pins and magnets for various surfaces.
- **Simple, uniform operating techniques.**


TECHNICAL DATA

ACCURACY ± 0,4 mm / m
SELF-LEVELLING RANGE ± 5°
LEVELLING automatic
OPERATING RANGE (depending on room illumination) 20 m
OPERATING RANGE with hand receiver (depends on how the technology affects the difference in brightness) 10 - 30 m
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
POWER SUPPLY 4 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME approx. 35 hours
OPERATING TEMPERATURE 0°C ... +40°C
STORAGE TEMPERATURE -10°C ... +70°C
DIMENSIONS (W x H x D) 140 x 170 x 125 mm (incl. wall mount)
WEIGHT (incl. batteries and wall mount) 845 g

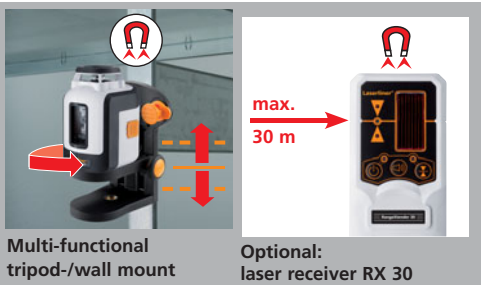

Multi-functional tripod-/wall mount

Optional: laser receiver RX 30



SmartLine-Laser 360°

inclusive softbag
+ tripod-/wall mount
+ batteries (4 x type AA)

Packing dimension (W x H x D)
190 x 315 x 170 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
SmartLine-Laser 360°	081.117A	4 021563 687176	5

