




Laserliner®

ActivePen



Safe non-contact voltage check

Rev.1214

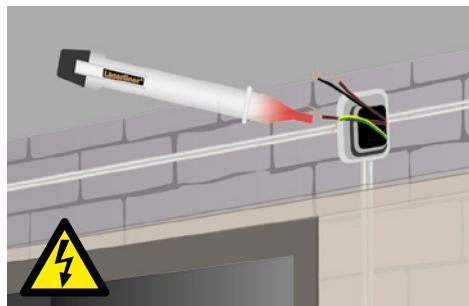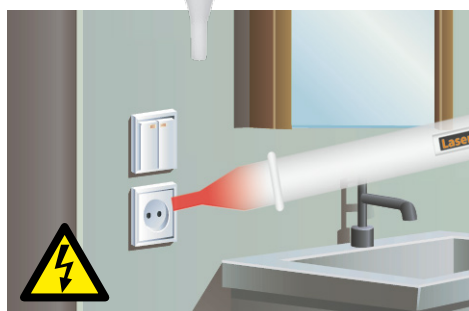

LED indicators

With pocket clip

- **Non-contact checking** of live AC voltage cables
- **Determines polarity of L/N conductors**, e.g. on sockets or terminals
- **Detection** of live lines from 200 V AC to 600 V AC
- **Locates electrical voltages** in cables, sockets, bulb sockets and fuses
- **Finds breaks** in wires and cables
- **Clearly visible LED** for signalling electrical voltages
- **CAT III - 600V** - can be used for measurements throughout building installations
- **Practical pen format**

TECHNICAL DATA

INDICATOR LED
VOLTAGE RANGE 200 V/AC ... 600 V/AC
FREQUENCY 50 ... 60Hz
OVERVOLTAGE CATEGORY CAT III - 600V
POWER SUPPLY 2 x 1.5V alkaline batteries (type AAA)
OPERATING TEMPERATURE -10°C ... 55°C
RELATIVE HUMIDITY 20%rH ... 80%rH, non-condensing
DIMENSIONS (W x H x D) 150 x 20 x 17 mm
WEIGHT (incl. batteries) 37 g



ActivePen
+ batteries

Packing dimension (W x H x D)

ARTICLE	ARTICLE NO	EAN-CODE	PU
ActivePen	083.007A	4 021563 690039	5

CAT III
600V

2x
AAA