


MasterCross-Laser 2G



Green cross-line laser with 2 clearly visible laser lines and integrated hand receiver mode

Rev.0216

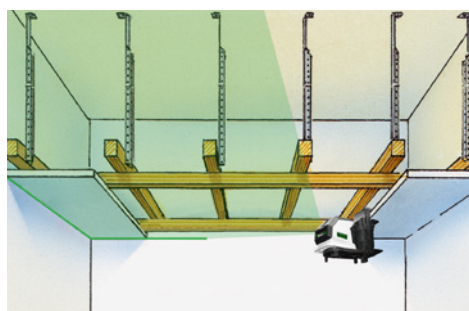


- **Green laser technology**
- Extremely bright green laser cross at front in the **DLD design achieves high-quality lines** as well as a clean and clear and therefore easily visible line image.
- With the **magnetic clamp and wall bracket** the device can be used as a standalone unit, in a combination as well as in horizontal and vertical position.
- Ideal for mounting horizontally and vertically on **drywall construction profiles**.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Tilt mode is an additional feature** that permits gradients to be laid out.
- **Individually switchable** laser lines
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **GRX-Ready:** in combination with the optional laser receiver, the integrated hand-held receiver mode permits detection of laser lines at long distances and under unfavourable light conditions.
- **Transport lock:** A pendulum lock protects unit during transport.

TECHNICAL DATA

ACCURACY	2 mm per 10 m
SELF-LEVELLING RANGE	± 3°
OPERATING RANGE (depending on room illumination)	25 m
LEVELLING	automatic
LASER WAVELENGTH	510 nm
LASER line lasers, class 2 < 1 mW	
POWER SUPPLY 4 x 1,5V type AA, approx. 4 hrs operating time	
WORKING TEMPERATURE	0°C ... +50°C
STORAGE TEMPERATURE	-10°C ... +70°C
WEIGHT MCL 2G incl. batteries	570 g (without wall bracket)
DIMENSIONS MCL 2G	66 x 100 x 125 mm (W x H x D)

1H 1V



Stand-alone device or in combination: clamp and wall bracket

Height and position of the measuring device easily adjustable

For mounting horizontally and vertically



MasterCross-Laser 2G
including carrying case
+ clamp and wall bracket
+ batteries

Packing dimension (W x H x D)
340 x 275 x 123 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
MasterCross-Laser 2G	031.370A	4 021563 695386	1

