



Accessories for laser and levelling devices

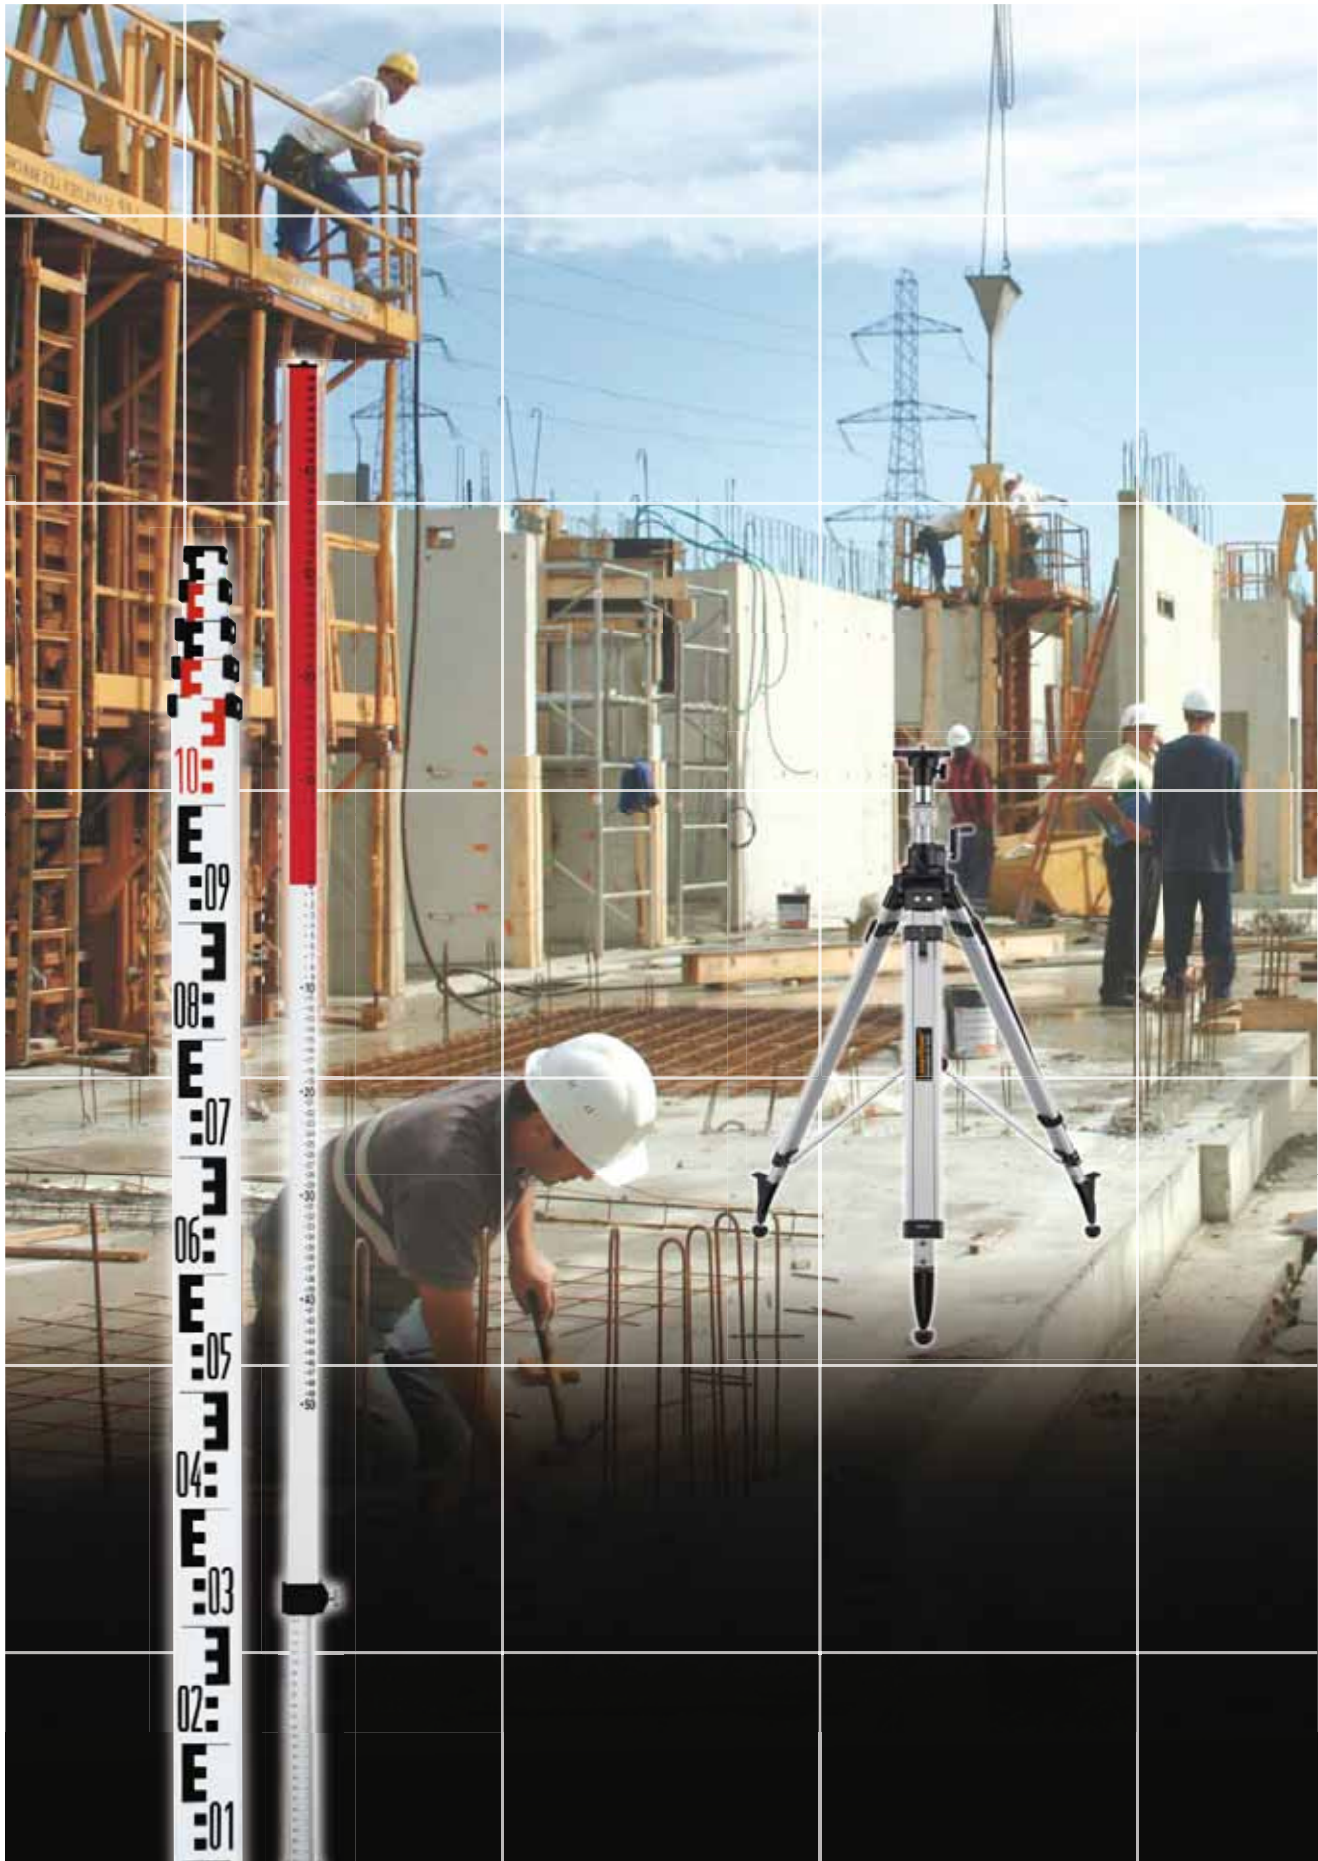

THE BASIS FOR RELIABLE WORK

To make full use of all the capabilities offered by a line- and rotation laser or automatic level, a tripod is necessary. Laserliner offers an extensive range of tripods, since different tasks call for different technical solutions. Wallmounts ease ceiling work.

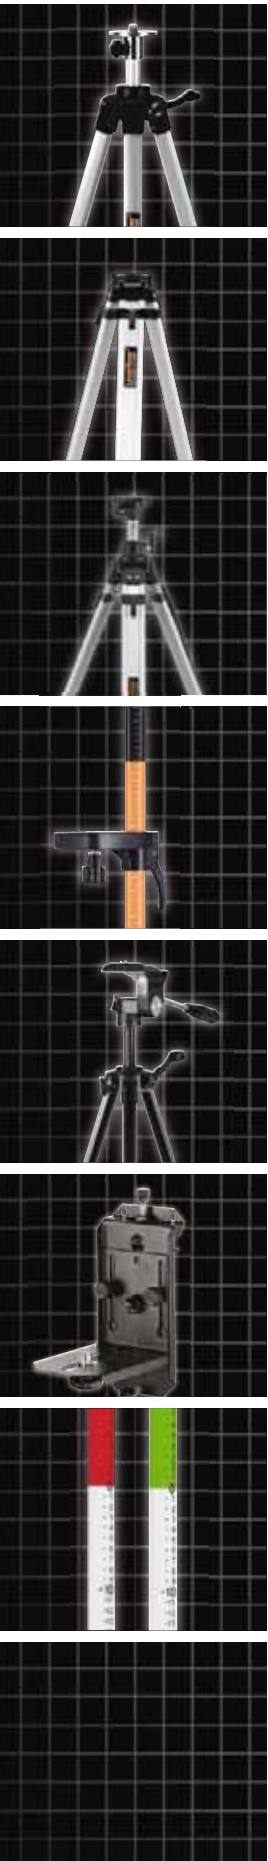

Quick-release lock for equal extension of all legs



The seat for the instrument is milled and surface-ground



An all-round steel chain prevents the legs from spreading on smooth floors



Crank lift with mm graduation



Sturdy steel feet for secure positioning



Hook for plumb bob directly beneath the fixing screw



Adjustable carrying strap

Professional crank lift on the professional crank tripod with mm graduation




Tripods

Compact Tripod 120 cm



- High-quality mini crank tripod of aluminium**
- Special combination feet (rubber steel tips) facilitate adaptation to different surfaces
 - 5/8" thread adapter
 - Circular bubble level
 - Crank lift 30 cm



ORDER NO. EAN-CODE PU


080.29 4 021563 652266 1



Compact Tripod 300 cm



- High-quality, very compact crank tripod made of aluminium**
- 5/8" thread adapter
 - Circular bubble level
 - Multi-section telescoping tripod legs and crank lift (31.5 cm) permit large adjustment range.
 - Special combination feet (rubber steel tips) facilitate adaptation to different surfaces



Inclusive: softbag

ORDER NO. EAN-CODE PU

080.37 4 021563 670666 1




Lightweight Tripod 165 cm

NEW



- Lightweight design with milled mounting surface**
- 5/8" thread adapter
 - Sturdy steel feet
 - Quick-release lock



Inclusive: hook for plumb bob, carrying strap

ORDER NO. EAN-CODE PU


080.02 4 011879 694082 1



Aluminium Lightweight Tripod 165 cm ⁽¹⁾



- Lightweight design with milled mounting surface**
- 5/8" thread adapter
 - Sturdy steel feet
 - Quick-release lock



Inclusive: hook for plumb bob, carrying strap

ORDER NO. EAN-CODE PU

080.00 4 011879 633967 1




Ball-head Tripod 165 cm



- Lightweight design with ball shaped mounting surface**
- 5/8" thread adapter
 - Sturdy steel feet
 - Quick-release lock

Special for automatic levels AL 22 / 26.



Inclusive: hook for plumb bob, carrying strap

ORDER NO. EAN-CODE PU

080.06 4 021563 658190 1




Tripods

Construction tripod 170 cm

NEW



- Heavy design with milled mounting surface**
- 5/8" thread adapter
 - Sturdy steel feet
 - Steel chains
 - Quick-release lock



Inclusive: hook for plumb bob, carrying strap

ORDER NO. EAN-CODE PU

080.11 4 021563 694105 1




Crank Tripod 170 cm

NEW



- Heavy design with integrated professional crank height adjustment**
- 5/8" thread adapter
 - Circular bubble level
 - Extremely long crank lift (46 cm) allows a large range of adjustment.
 - Crank can be fixed in place without any play.
 - Special combination feet (rubber steel tips) facilitate adaptation to different surfaces
 - Sturdy steel feet



Inclusive: carrying strap

ORDER NO. EAN-CODE PU

080.28 4 021563 695218 1




Crank Tripod 260 cm

NEW



- Heavy design with integrated professional crank height adjustment**
- 5/8" thread adapter
 - Circular bubble level
 - Extremely long crank lift (70 cm) allows a large range of adjustment.
 - Crank can be fixed in place without any play.
 - Special combination feet (rubber steel tips) facilitate adaptation to different surfaces
 - Sturdy steel feet
 - Steel chains



Inclusive: carrying strap

ORDER NO. EAN-CODE PU

080.35 4 011879 633462 1




Crank Tripod 300 cm

NEW



- Heavy design with integrated professional crank height adjustment**
- 5/8" thread adapter
 - Suitable for windy conditions thanks to stability fitting
 - Circular bubble level
 - Extremely long crank lift (60 + 60 cm) allows a large range of adjustment.
 - Crank lift can be fixed and adjusted without play.
 - Special combination feet (rubber steel tips) facilitate adaptation to different surfaces
 - Sturdy steel feet



Inclusive: carrying strap

ORDER NO. EAN-CODE PU

080.39 4 021563 694075 1



Telescopic Stand 330 cm



- High-quality aluminium telescopic stand, ideal for quick changes in applications where working positions vary**
- 1/4" and 5/8" thread adapter
 - The stand is clamped between floor and ceiling then the laser measuring tool is turned manually to set it to the correct height ready for operation.
 - 5-piece design for easy transport
 - Height approx. 330 cm

Inclusive: telescopic adapter, softbag



ORDER NO. EAN-CODE PU

090.120A 4 021563 665372 4



TelePod 270 cm

NEW



- High-quality aluminium telescopic stand, ideal for quick changes in applications where working positions vary**
- The stand is clamped between floor and ceiling then the laser measuring tool is turned manually to set it to the correct height ready for operation.
 - 4-piece design for easy transport
 - Height approx. 270 cm



Inclusive: softbag

ORDER NO. EAN-CODE PU

090.140A 4 021563 695997 4





Tripods and fasteners

FixPod 155 cm



Tripod for SuperCross-Laser series, SmartLine-Laser 360°, SmartCross-Laser and laser distance meters
 – 1/4" tripod connection
 – 3-way tripod head
 – Crank lift (30 cm) and telescopic tripod legs
 – Rubber-steel tips for use on different surfaces



Inclusive: softbag

ORDER NO.	EAN-CODE	PU
090.132A	4 021563 678990	6



Tripod Mount



Tripod mount for compact line lasers
 – For securing 1/4" or 5/8" thread tripods to the bottom
 – For use on walls and magnetic objects

For all laser measuring devices with 1/4" threads.

ORDER NO.	EAN-CODE	PU
036.26	4 021563 692934	1



Magnetic Wall Mount



Two magnetic wall brackets – versatile use
 – Can be used individually or in combination – on walls and magnetic objects

For all laser measuring devices with 1/4" threads.



ORDER NO.	EAN-CODE	PU
036.25	4 021563 689934	1



CrossGrip

NEW



0°

POSITION

90°



Clamp and wall bracket – versatile use
 – Can be used individually or in combination – on walls and magnetic objects

For all laser measuring devices with 1/4" threads.



ORDER NO.	EAN-CODE	PU
036.27	4 021563 695478	1



CenterBase

NEW



Alignment base for 3D line laser
 – Stable metal base with vernier adjustment
 – The free-moving base plate allows the floor or ceiling cross to be positioned exactly, even when the unit is mounted on a tripod.
 – Adjustable feet and circular bubble levels for optimum setup.

For all laser measuring devices with 5/8" threads.



ORDER NO.	EAN-CODE	PU
036.28	4 021563 695805	1



Levelling staffs and fasteners

Wall Mount Pro



For Laserliner rotary- and linelasers
 – With positioning wheel for precise height adjustment, clamp holder for attachment to structural elements.

For all laser measuring devices with 5/8" threads.



ORDER NO.	EAN-CODE	PU
080.71	4 021563 658817	1



Angle Bracket 5/8"



Professional design with angle scale
 – Tripod adapter for aligning inclines

For all laser measuring devices with 5/8" threads.

ORDER NO.	EAN-CODE	PU
080.75	4 021563 662821	1



TelePilot 5 m



Steel tape measure with viewing window


Professional telescopic measure with window
 – Allows even great heights to be read with accuracy
 – Guided, inside steel tape measure
 – For inside and outside measurement
 – With lock for each individual section



ORDER NO.	EAN-CODE	PU
075.105	4 011879 635398	1

Flexi Levelling Staff Plus red / green

NEW



UNLIMITED MOVE

For all measurement of floor height
 – Reference height approx. 80-190 cm ± 50 cm measurement range, max. length approx. 240 cm
 – Height difference can be read off directly with no calculation necessary
 – Unmatched by any normal levelling staff

FlexiSlider

– Optimum positioning aid for laser receiver at Flexi levelling staff
 – Smooth slider for quick and easy use
 – With quick-action clamp

Flexi levelling staff red

– Ideal for red lasers

Flexi levelling staff green

– Ideal for green lasers



Inclusive: FlexiSlider



	ORDER NO.	EAN-CODE	PU
red	080.50	4 011879 631147	1
green	080.51	4 021563 664948	1

Telescopic Levelling Staff LT 4 m / 5 m

NEW



Easily legible, highly stable levelling staffs for use even under extreme conditions

– Made of strong aluminium section
 – For optical levels and rotary lasers
 – Telescopic Levelling Staff 4 m: max. height 4 m, min. height 1.19 m
 – Telescopic Levelling Staff 5 m: max. height 5 m, min. height 1.22 m



	ORDER NO.	EAN-CODE	
	080.42	4 021563 694112	4 m
	080.43	4 021563 694129	5 m