

Laserliner®

PipeControl- LevelFlex-Camera




30 m
DOF 5...60 cm




Professional camera unit with integrated self-levelling for optimum camera alignment

Rev.0716

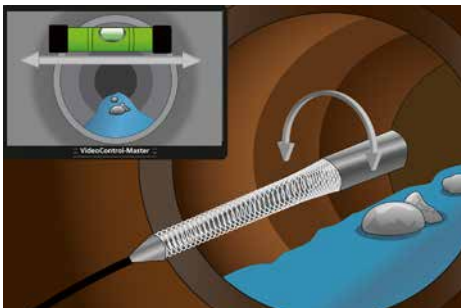

- **31 mm stainless steel camera head** with adapter to replace the camera head
- **Integrated self-levelling** for optimum camera alignment
- **No pull-back** thanks to **flexible coil spring**
- Powerful object lighting thanks to **12 high-performance LEDs**
- **Sturdy, stand-up reel** with 30 m cable
- **Stable, reinforced feed cable** (ø 6 mm) for precise and safe camera guidance

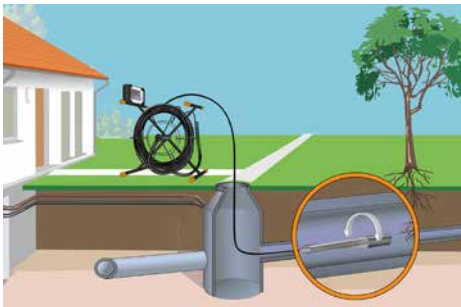

With accessory Rolladapter

- Rolladapter for pipes > 160 mm

Only for VideoControl-Master.



Camera head with 12 high-performance LEDs

Adapter to replace the camera head

ARTICLE	ARTICLE NO.	EAN CODE	PU
PipeControl-LevelFlex set	084.133L	4 021563 691357	1

TECHNICAL DATA

TYPE OF CAMERA	CMOS image sensor
CAMERA HEAD / CABLE	ø 31 mm, IP 68 (immersion depth 20 m, 1h)
CAMERA RESOLUTION	640 x 480 pixels
FIELD OF VISION	71°
FOCAL DEPTH	5 ... 60 cm
CABLE DIAMETER	6 mm
CABLE LENGTH	30 m
REEL DIAMETER	39 cm
MINIMUM BENDING RADIUS	70 mm
OPERATING TEMPERATURE	-10 ... 60°C
STORAGE TEMPERATURE	-20 ... 70°C
WEIGHT	4.7 kg
DIMENSIONS (W x H x D)	435 mm x 410 mm x 256 mm



PipeControl-LevelFlex-Camera

inkl. L-BOXX 136
+ control cable
+ Rolladapter

Packing dimension (W x H x D)
442 x 151 x 357 mm

CAMERA 640 x 480 pixel LED LIGHT IP 68

