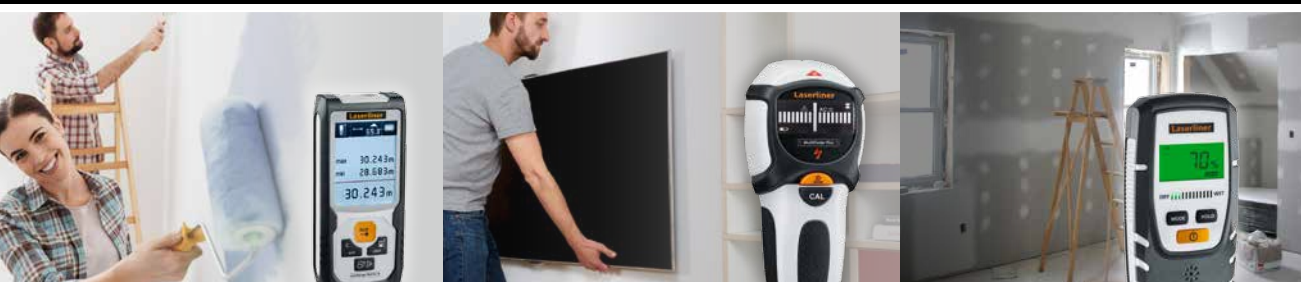# Laserliner

Measuring technology for use around the house, apartment and garden

HIGH VISIBILITY

BRIGHTER. CLEARER. MORE VISIBLE.

6x

EasyCross-Laser Green
more on page 11
6 times brighter than a typical red 630 - 660 nm laser

Laserliner

Bluetooth®
CONNECTION

FREE MeasureNote App –
Multifunctional app for
measuring technology with Bluetooth!

Further information on page 9

GET IT ON
Google Play

Download on the
App Store

Humidity and moisture measuring devices

- **Live healthier – monitoring room climate, avoid high humidity**
- **Locate thermal bridges, prevent mould and mildew**

- **Increasing calorific value, minimising pollution**
- **Protect stove and fireplace from sooting**
- **Avoid damage to the fabric of a building**

ClimaHome-Check

Digital thermo- and hygrometer

- Ambient temperature, relative air humidity

Order No. 082.028A
EAN 4 021563 687855

ClimaPilot

Digital hygrometer

- Ambient temperature, relative air humidity, dew point temperature

Order No. 082.034A
EAN 4 021563 687886

DampCheck

Moisture and temperature measuring device

- Dryness level of wood, moisture in plaster, ambient temperature

Order No. 082.003A
EAN 4 021563 689996

CondenseSpot Plus

Non-contact infrared thermometer

- Surface temperature, dew point temperature, condense water indicator
- Colour alarm function for thermal bridge warning

Order No. 082.046A
EAN 4 021563 688098

WoodTester Compact

Wood moisture measuring device

- Dryness level of firewood

Order No. 082.004A
EAN 4 021563 690008

ø 1 m

12 m

The 8-point laser circle pinpoints the measuring zone exactly

DampFinder Compact

Wood and construction moisture measuring device

- Dryness level of wood, moisture in building materials

Order No. 082.015A
EAN 4 021563 690015

MoistureFinder Compact
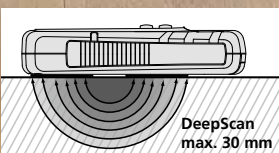
Material moisture measuring device

Quick and non-destructive

Dryness level of soft- and hardwood, moisture in plaster and cement screed

Order No.082.332A
EAN 4 021563 694457

DeepScan max. 30 mm

Laserliner

Temperature measuring instruments

- Reduce heating costs – regulate the temperature optimal, detecting draughty windows or doors

Video inspection

- Carrying out visual checks on inaccessible places – pipes, cables, air shafts, roof gutters, extractors etc.

ThermoTester

Digital thermometer
- Can be dipped or inserted

Order No. 082.030A
EAN 4 021563 664986

ThermoSpot One

Non-contact infrared temperature instrument

Measure without contact

- Surface temperature

Order No. 082.038A
EAN 4 021563 689989

ø 1 m

12 m

The target laser pinpoints the measuring range

VideoScope Home

Inspection camera 2 m
- Screen size: 2.7"
- Camera resolution: 320 x 240 pixels
- TV-Out port
- 2 x digital zoom

Order No. 082.253A
EAN 4 021563 696086

VideoScope XXL

Inspection camera 5 m
- Screen size: 3.5"
- Camera resolution: 640 x 480 pixels
- TV-Out port
- 1.5 x digital zoom, record function, data transfer to PC

Order No. 082.115A
EAN 4 021563 687404

ø 9 mm

2 m
DOF 3...7 cm

ø 9 mm

5 m
DOF 1...6 cm

**Leading brand name products.
Convincing. Professional. Innovative.
Recommended by craftsmen.**

4 YEARS WARRANTY
JAHRE GARANTIE
CERTIFIED DESIGN AND QUALITY

Electrical meters

- **Protect the environment – completely exhaust battery**
- **Checking sockets for greater safety at home**
- **Ensuring devices are connected safely to the power supply**

- **Identifying life-threatening hazards when working on electrical wiring**
- **Avoid electric shock**

BatteryCheck

Battery tester

- For checking charge level of all commonly used batteries

Order No. 083.005A
EAN 4 021563 690022

PowerCheck

Battery tester

- For checking charge level of all commonly used batteries and rechargeable batteries

Order No. 083.006A
EAN 4 021563 687879

ActivePen / ActiveFinder

Non-contact voltage testers

- Detection of live AC voltage cables, determining polarity of L/N conductors, finding breaks in cables
- **Only ActiveFinder –** extremely high sensitivity for tracing lines at great depths (zoom)

ActivePen
Order No. 083.007A
EAN 4 021563 690039

ActiveFinder
Order No. 083.010A
EAN 4 021563 671144

ActiveFinder

LiveCheck

Connection test device for sockets
(type CEE 7/4 / type F)

- Identifying faulty wiring, finding incorrectly installed PE conductors, L/N polarity test

Order No. 083.026A
EAN 4 021563 694488

Laserliner will be happy to advise you when choosing the right measurement device to find the perfect solution for every application.

TipTest Duo set

Phase testers (2 pieces)

- Quickly checking the L-conductor at electrical connections

Order No. 083.009A
EAN 4 021563 695645

⚡ Electrical meters

- **Check building electrics reliably and quickly**
- **Avoid power failure**
- **Increase building safety**

- **Determining measured values, identifying faults**
- **Can be used in many areas – vehicle electronics, audio systems, IT, model making, etc.**

ActiveTester

Universal voltage tester

- Automatic AC voltage and DC voltage test, automatic range changeover

Order No. 083.020A
EAN 4 021563 671151

MultiMeter-Home

Analogue multimeter

- Measurement of voltage, current, resistance and battery charge level, range and function changeover

Order No. 083.030A
EAN 4 021563 671175

MultiMeter

Universal multimeter

- Measurement of voltage, current, resistance, battery- and rechargeable battery charge level, diode test function

Order No. 083.031A
EAN 4 021563 694518

ActiveMaster

Universal voltage and continuity tester

- Automatic AC voltage and DC voltage test, automatic range and function changeover, single-phase and rotary field test, single-pole phase testing, continuity test, safety self-test

Order No. 083.021A
EAN 4 021563 671168

MultiMeter-PocketBox

Universal multimeter

- Measurement of voltage, current and resistance, continuity test, diode test function, automatic range and function changeover

Order No. 083.028A
EAN 4 021563 690053

MultiMeter-Compact

Professional multimeter

Precise measurements

- Measurement of voltage, current, resistance, capacitance, frequency and pulse duty factor, continuity test, diode test function, automatic range changeover and manual range preselection, integrated, contactless voltage indicator

Order No. 083.034A
EAN 4 021563 671236

MultiMeter-Pocket

Universal multimeter

- Measurement of voltage,
  current and resistance,
  continuity test,
  diode test function,
  automatic range and
  function changeover,
  integrated, contactless
  voltage indicator

Order No. 083.032A
EAN 4 021563 671229

- Checking internet access
  and new wiring –
  locating and analysing
  faults
- Locating and assigning
  existing cables

LAN-Check

LAN cable connection tester

- Network cabling continuity test
  for RJ 45, assignment and fault analysis
  of individual conductors

Order No. 083.064A
EAN 4 021563 694716

CableChecker

Cable and conductor tester
with transmitter and receiver

- For off-circuit electrical
  systems – LAN, TV, telephone,
  audio and other cables
- Non-contact tracing of
  the transmission signal

Order No. 083.065A
EAN 4 021563 694471

MultiClamp-Meter

Current and voltage clamp meter

- For all closed current circuits
- Measurement of voltage, current, resistance,
  direct and alternating current,
  continuity test,
  diode test function,
  Peak-HOLD function,
  integrated, contactless voltage indicator,
  min./max.-function,
  true r.m.s. measurement

Order No. 083.040A
EAN 4 021563 671205

MultiCable-Checker

Cable and conductor tester
with transmitter and receiver

- For off-circuit electrical
  systems – LAN, SAT, TV,
  telephone, audio and
  other cables
- Assignment of individual
  conductors in LAN network
  cable assemblies,
  continuity test,
  non-contact tracing
  of cable routing

Order No. 083.062A
EAN 4 021563 694709

**It is particularly important that the electrical systems
within the home are working correctly in order to
prevent extensive damage from occurring.**

4 YEARS WARRANTY JAHRE GARANTIE

CERTIFIED DESIGN AND QUALITY

AC-Tracer

Cable tracer with
transmitter and receiver

- For live cables
- Non-contact tracing
  of the transmission signal,
  fast tracing of coherent
  electrical circuits,
  location of lines,
  detection of fuse circuits

Order No. 083.050A
EAN 4 021563 672103

Laserliner

Electronic scanners

- **Drill safely – avoid drilling into pipes or lines**
- **Finding stable locations for washbasins, cabinets, etc. or a wiring-free area for a feed-through**
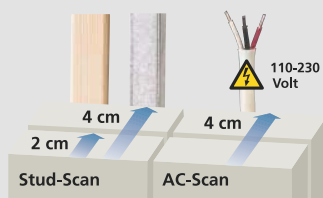
StarFinder / StarFinder Plus

Electronic scanners

- For wood and metal (beam location), live cables

StarFinder
Order No. 080.969A
EAN 4 021563 697830

**StarFinder Plus**
Order No. 080.972A
EAN 4 021563 684182

110-230 Volt

4 cm
2 cm
Stud-Scan

4 cm
AC-Scan

Star Finder Plus

CombiFinder Plus

Electronic scanner

- For metal, copper, iron and live cables

Order No. 080.955A
EAN 4 021563 684199

7,5 cm
5 cm
Metal-Scan

110-230 Volt
4 cm
AC-Scan

MultiFinder Plus

Universal scanner

One for all

- For wood (beam location), metal, copper, iron and live or non-live cables

Order No. 080.965A
EAN 4 021563 684175

110-230 Volt

4 cm
2 cm
Stud-Scan **AC-Scan**

10 cm
5 cm
Metal-Scan

Slope indicators

MasterLevel Box

Digital electronic spirit level

A little big helper

- Accuracy ± 0.2°
- 360° angle-display, 180° flip-display, reference function for transferring angles
- Strong magnets

Order No. 081.260A
EAN 4 021563 700226

DigiLevel Plus

Digital electronic spirit levels

- Accuracy max. ± 0.1°
- 360° angle-display, 180° flip-display, reference function for transferring angles
- Strong magnets

25 cm	40 cm	60 cm
Order No. 081.249A	Order No. 081.250A	Order No. 081.251A
EAN 4 021563 699315	EAN 4 021563 690664	EAN 4 021563 690671

25 cm

40 cm

60 cm

FREE MeasureNote App
Manage measured values intelligently

- **Store measured data in one place with map inclusive address**
- **Insert photo markers**
- **Automatic voice output of measured values**
- **Note down details in the notebook**
- **Send object photos with measured values by email, WhatsApp etc.**

- **The last known location is stored**
- **Direct link to operating instructions of the device**
- **Enables remote triggering of measurement**
- **Calculator for calculations with the transferred measurements**

1,996 m

14.07.18

0,698 m

0,803 m

Bluetooth®
CONNECTION

DistanceMaster Compact Plus
Laser distance meter

Robust housing for everyday life on construction sites

- Accuracy ± 2 mm *
- Distances, areas, volumes, min./max./continuous measurement

Order No. 080.938A
EAN 4 021563 694211

max. 40 m *

LaserRange-Master T4 Pro
Laser distance meter

Simple operation with touch display

- Accuracy ± 2 mm *
- Distances, areas, volumes, continuous measurement, Pythagoras 1 + 2, angle function 1 + 2

Order No. 080.850A
EAN 4 021563 698158

max. 40 m *

The Bluetooth® word mark and the logo are registered trademarks of Bluetooth SIG Inc.
* See operating instructions for specific measuring ranges and accuracies

Distance meters

- **Measuring heights, walls, floors and living spaces**
- **Calculating material quantities precisely**
- **Marking out areas for a terrace or a house**

DistanceMaster Compact

Laser distance meter

- Accuracy ± 2 mm *
- Distances, areas, volumes, min./max./continuous measurement

Order No. 080.936A
EAN 4 021563 691036

max. 25 m*

LaserRange-Master i2 / LaserRange-Master i3

Laser distance meters

- Accuracy ± 2 mm *
- Distances, areas, volumes, min./max./continuous measurement

max. 20 m*

max. 30 m*

LaserRange-Master i2
Order No. 080.829A
EAN 4 021563 702824

LaserRange-Master i3
Order No. 080.830A
EAN 4 021563 694204

LaserRange-Master i5

Laser distance meter

Digital bubble level

- Accuracy ± 1.5 mm *
- Distances, areas, volumes, min./max./continuous measurement, angle function 1 + 2 + 3

Order No. 080.835A
EAN 4 021563 703715

max. 50 m*

x

y

$$x \cdot y = m^2$$

LaserRange-Master T2 / LaserRange-Master T3

Laser distance meters

- Accuracy ± 2 mm *
- Distances, continuous measurement
- **Only LaserRange-Master T3** – areas, volumes, Pythagoras 1 + 2, angle function 1 + 2, touch display

max. 20 m*

max. 30 m*

LaserRange-Master T2
Order No. 080.820A
EAN 4 021563 701933

LaserRange-Master T3
Order No. 080.840A
EAN 4 021563 698141

RollPilot Mini / RollPilot S12

Measuring wheels

- Accuracy ± 0.1%
- For straight lines and curves
- Addition forwards, subtraction backwards
- **Only RollPilot Mini** – measurements from wall to wall

RollPilot Mini
Order No. 075.002A
EAN 4 021563 660667

RollPilot S12
Order No. 075.005A
EAN 4 021563 672714

1x = 0,5 m

1x = 1 m

max. 9.999,9 m

Laserliner measuring devices help you to carry out the work with high precision in no time at all.

4 YEARS WARRANTY JAHRE GARANTIE

CERTIFIED DESIGN AND QUALITY

HIGH VISIBILITY
Brighter. Clearer. More visible.

- **Strong luminosity, better visibility –
  6 times brighter than a typical red 630 - 660 nm laser**
- **Perform alignment work in large rooms
  with high ceilings**
- **Adjust exactly despite bright ambient light**

6x

EASIER. COMPACT.

**Modern
design**

**Practical
base**

EasyCross-Laser Green
Automatic cross-line laser
- Slope function
- Self-levelling range ± 3°,
  accuracy ± 0.5 mm / m

Order No. 081.080A
EAN 4 021563 703418

1/4"

SmartVision-Laser set
Automatic cross-line laser
with clamping bracket
- Individually switchable lasers,
  slope function
- Self-levelling range ± 5°,
  accuracy ± 0.5 mm / m

Clamping bracket
- Easy-to-adjust,
  damage free mounting

Order No. 081.336A
EAN 4 021563 698967

1/4"

Laserliner

Universal lasers for homes and gardens

- **Work precise –** alignment at a 90° angle
- **Ideal for laying** wall or floor tiles

- **Automatic adjustment** makes many jobs easier – installing windows, papering, hanging shelves or pictures, etc.
- **Setting up inclines easy**

EasyCross-Laser
Automatic cross-line laser

Simple operation

- Slope function
- Self-levelling range ± 3°, accuracy ± 0.5 mm / m

Order No. 081.070A
EAN 4 021563 703401

1/4"

LaserCube
Line laser
- Pins for wall mounting
- Accuracy ± 1 mm / m

Order No. 081.108A
EAN 4 021563 687848

SmartCross-Laser
Automatic cross-line laser
- Individually switchable lasers, slope function
- Self-levelling range ± 5°, accuracy ± 0.5 mm / m

Order No. 081.115A
EAN 4 021563 684533

HandyLaser Compact
Laser spirit level
- Strong magnets
- Vial accuracy ± 0.5 mm / m

Order No. 025.03.00A
EAN 4 021563 657841

SuperLine 2D
Line laser
- Pins for wall mounting, magnets, rotatable angle scale
- Accuracy ± 1 mm / m

**Order No. 081.110A**
EAN 4 021563 662579

CompactCube-Laser 3
Automatic cross-line laser with 90° laser on the side
- Individually switchable lasers, slope function
- Self-levelling range ± 3°, accuracy ± 0.5 mm / m

Order No. 036.150A
EAN 4 021563 696710

1/4"

SuperSquare-Laser 4
90° line laser
- Pins for wall mounting, 90° lay edge
- Angle accuracy ± 0.5 mm / m

Order No. 081.134A
EAN 4 021563 692651

FlexClamp
Clamping bracket
- Easy-to-adjust, damage free mounting

Order No. 090.133A
EAN 4 021563 684618

1/4"

- **Save time and work more accurately – set up the laser once**
- **The height-adjustable bracket allows a quick and flexible change of position**

- **Transfer markings from the floor to the ceiling easily**
- **The optional laser receiver makes also outdoor work possible**

SmartLine-Laser 360°

Automatic 360° line laser with tripod/wall bracket

SUNLIGHT OPTION

RX READY

Horizontal 360° laser circle

- Individually switchable lasers, slope function
- Self-levelling range ± 5°, accuracy ± 0.4 mm / m

Tripod / wall bracket
- Pins for wall mounting, magnets
- Stepless height adjustment

**Order No. 081.117A**
EAN 4 021563 687176

1/4" 5/8"

SuperCross-Laser 2P

Automatic cross-line laser with tripod/wall bracket

SUNLIGHT OPTION

RX READY

- Individually switchable lasers, slope function
- Self-levelling range ± 4°, accuracy ± 0.5 mm / m

Tripod / wall bracket
- Pins for wall mounting, magnets
- Stepless height adjustment

Order No. 081.125A
EAN 4 021563 670864

1/4" 5/8"

RX READY

**Ideal for outdoor applications and in bright ambient light**

max. 30 m

RangeXtender 30 Mag

Laser receiver
- For line lasers with RX-Ready technology
- Head magnet, universal mount

Order No. 033.25A
EAN 4 021563 672394

SUNLIGHT OPTION

Laserliner

Rotary lasers

- **Transferring height, alignment and inclination measurements over large distances**
- **Align wall studding, walls and steps exactly**
- **Level large areas horizontally – avoid bumps in foundations**
- **Avoid constant remeasures**

Ideal for large distances…

max. 120 m

5/8"

### …and in bright ambient light

max. 100 m

5/8"
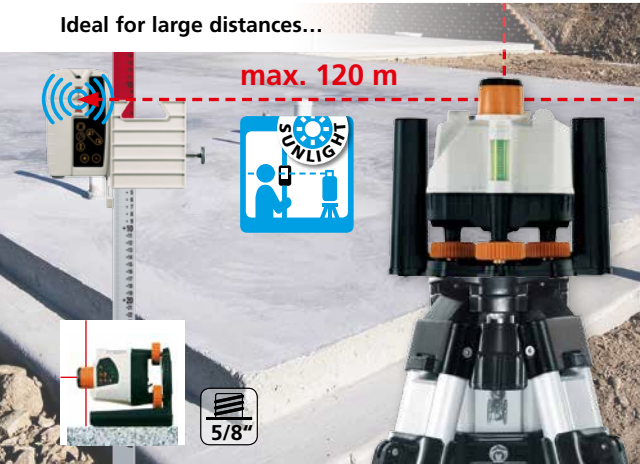
BeamControl-Master 120 set

Rotary laser with precision adjustment

Incl. laser receiver SensoCommander 120, aluminium lightweight tripod 165 cm and flexi levelling staff Plus

- Laser modes: spot, scan, rotary and hand receiver mode
- Accuracy ± 0.2 mm / m

Order No. 026.04.00A
EAN 4 021563 665181

man   man   man

90°

AutoSmart-Laser 100 set

Automatic rotary laser

Incl. laser receiver SensoLite 100 and compact tripod 150 cm

- Laser modes: spot, scan, rotary and hand receiver mode
- Self-levelling range ± 4°, accuracy ± 0.4 mm / m

Order No. 055.04.00A
EAN 4 021563 674992

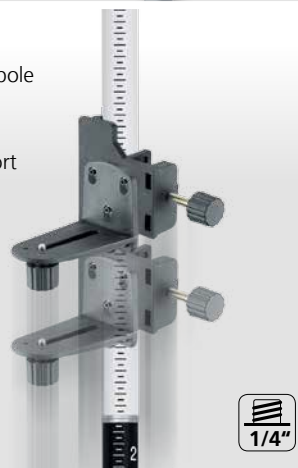auto   auto

90°

Tripod

TelePod 270 cm

Aluminium telescopic clamping pole with clamping bracket

- For room heights up to 2.70 m
- 4-piece design for easy transport

Order No. 090.140A
EAN 4 021563 695997

UNLIMITED MOVE

1/4"

✚ … and more

- **Measuring instruments for every purpose**
- **Helpers when it should be fast**

- **Check the gas supply early and safely**
- **Measure the optimal cooking level in seconds**

CarryMax
Digital hanging scale
- For the easy and comfortable measurement of luggage, backpacks, bags etc.

Order No. 085.100A
EAN 4 021563 687787

GasCheck
Level measuring device
- For steel LPG cylinders (5 kg / 11 kg)

Order No. 082.163A
EAN 4 021563 703654

FULL   **SCAN**   **EMPTY**

EMPTY
FULL

TireCheck
Digital tester
- Measurement of tyre pressure (psi / bar) and heating reservoirs, checking tread depth (mm)

Order No. 082.180A
EAN 4 021563 690077

ThermoMaître
Professional thermometer for grilling, cooking and roasting
- Display of optimal cooking temperatures for beef, pork, lamb, chicken and fish

Order No. 082.029A
EAN 4 021563 688203

58.7°C

2in1

ThermoInspector
Multisensor thermometer

4°C…60°C   <4°C / >60°C

Measure safely

- Non-contact infrared surface thermometer
- Fold-out probe thermometer

Order No. 082.037A
EAN 4 021563 699001

Laserliner

LaserRange-Master T7
Laser distance meter

Simple operation
with touch display

- Accuracy ± 2 mm *
- Distances, areas, volumes, min./max./continuous measurement, addition/subtraction, Pythagoras 1 + 2 + 3

* See operating instructions for specific measuring ranges and accuracies

Order No. 080.855A
EAN 4 021563 703647

High range
max. 70 m *

Further laser distance meters on pages 9 and 10

4 YEARS WARRANTY / JAHRE GARANTIE
CERTIFIED DESIGN AND QUALITY

Devices bought after 01.03.2016 have a warranty of 4 years from purchase date on. Rechargeable batteries and accessories are excluded.

Further information on www.laserliner.com/garantie

Dealer

020.902.04GB
Rev18W39

As long as stock available.