Laserliner

RangeXtender 60

Laser receiver with RX-READY technology

- For all red line lasers with RX-Ready technology
- Fast alignment work in close and long distance
- RX-Ready: laser lines pulsate at a high frequency
- Detection of the laser lines up to max. 60 m
- High-Speed: very fast detection of laser lines
- Head magnet
- Universal mount

TECHNICAL SPECIFICATIONS	
POWER SUPPLY	4 x 1.5V LR03 (AAA)
OPERATING TIME	approx. 80 hours
OPERATING CONDITIONS	-10°C … 40°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-20°C … 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	75 mm x 148 mm x 22 mm x (without universal mount)
WEIGHT	215 g (incl. batteries / without universal mount)

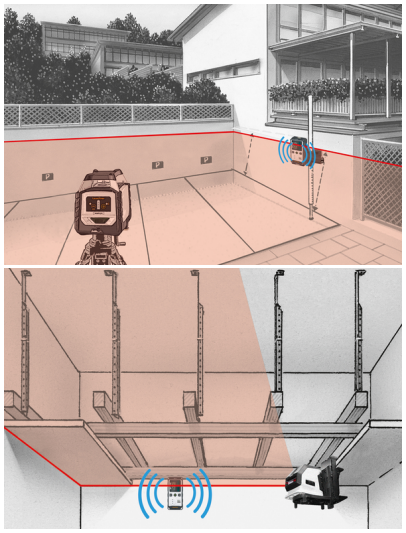

RX READY · OPTION · HIGH SPEED · AutoSound · IP 66 · 4x AAA · HARD

RangeXtender 60	**ORDER NO.** 033.50A	**EAN-CODE** 4021563710157	**PU** 1

UMAREX GmbH & Co. KG • Donnerfeld 2 • 59757 Arnsberg • Germany • Tel. +49 2932 638-300 • Fax +49 2932 638-333 • info@laserliner.com • www.laserliner.com