

## RangeXtender RX 51



Laser receiver for all line lasers with RX-READY technology

Rev. 1009



- With RX-READY, the laser lines pulsate at a high frequency. **This pulsation allows the range extender to detect laser lines up to a maximum of 50 m away.**
- **The universal mount** enables the device to be attached to levelling staffs.




### TECHNICAL DATA

**LASER RECEPTION RANGE**  
max. 50 m radius

**POWER SUPPLY**  
1 x 9V block

**WEIGHT** 0.2 kg

**DIMENSIONS**  
51 x 150 x 27 mm (WxHxD)

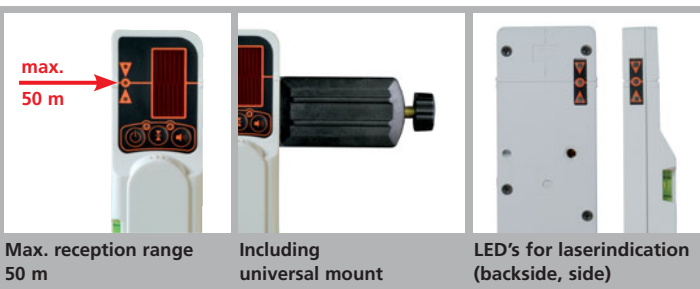

Max. reception range 50 m

Including universal mount

LED's for laserindication (backside, side)



**Article-No: 033.20-1**

EAN-Code: 4 021563 662920

**RangeXtender RX 51**  
including universal mount  
+ battery

PU 1

### OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Flexi Levelling Staff	080.50	4 011879 631147	1