

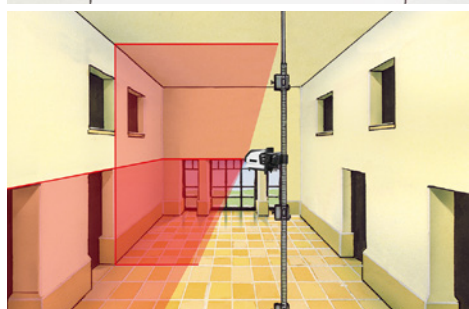


MasterCross-Laser 2P

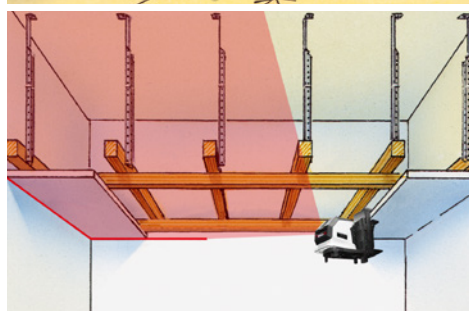

Cross-line laser with 2 clearly visible laser lines, plumb function and integrated hand receiver mode

Rev.0216

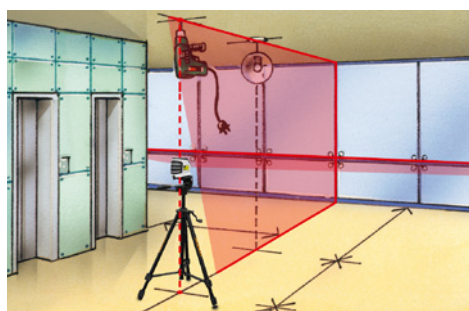


- **PowerBright-Laser⁺**: Special high-performance laser diodes project extremely visible laser lines.
- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- Additional plumb laser at top and bottom
- With the **magnetic clamp and wall bracket** the device can be used as a standalone unit, in a combination as well as in horizontal and vertical position.
- Ideal for mounting horizontally and vertically on **drywall construction profiles**.
- **Automatic Level**: automatic alignment by virtue of a magnetic pendulum system.
- **Tilt mode is an additional feature** that permits gradients to be laid out.
- **Individually switchable** laser lines and plumb laser
- **Out-Of-Level**: is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready**: The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 50 m radius – ideal for all interior and exterior applications.
- **Transport lock**: A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

TECHNICAL DATA

ACCURACY 2 mm per 10 m
SELF-LEVELLING RANGE ± 3°
OPERATING RANGE (depending on room illumination) 20 m
LEVELLING automatic
LASER WAVELENGTH 635 nm
LASER line lasers, class 2 < 1 mW
POWER SUPPLY 4 x 1,5V type AA, approx. 8 hrs operating time
WORKING TEMPERATURE 0°C ... +50°C
STORAGE TEMPERATURE -10°C ... +70°C
WEIGHT MCL 2P incl. batteries 560 g (without wall bracket)
DIMENSIONS MCL 2P 66 x 100 x 125 mm (W x H x D)


1H 1V 2P



Additional plumb laser at top and bottom



Height and position of the measuring device easily adjustable



For mounting horizontally and vertically



MasterCross-Laser 2P
including carrying case
+ clamp and wall bracket
+ batteries

Packing dimension (W x H x D)
340 x 275 x 123 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
MasterCross-Laser 2P	031.360A	4 021563 695379	1

