


# Laserliner®

## AutoCross-Laser 3C Pro



Professional cross-line laser with 3 super-bright laser lines and additional plumb laser

Rev.1215

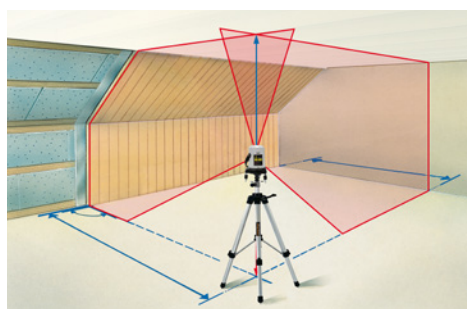


- **PowerBright-Laser:** Special high-performance laser diodes project extremely visible laser lines.
- This unit produces **3 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **2 vertical lines** are aligned at right angles to one another.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Individually switchable** laser lines.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 40 m radius – ideal for all interior and exterior applications.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Illuminated vial** and **height-adjustable feet** for preliminary adjustment of the unit.
- **Removable rubber caps.**
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

### TECHNICAL DATA

<b>ACCURACY</b>	2 mm per 10 m
<b>SELF-LEVELLING RANGE</b>	± 2.5°
<b>LEVELLING</b>	automatic
<b>LASER RECEPTION RANGE (optional)</b>	max. 40 m radius
<b>LASER WAVELENGTH</b>	635 nm
<b>LASER</b>	line lasers, class 2, < 1 mW plumb laser, class 2, < 1 mW
<b>POWER SUPPLY</b>	4 x 1.5V (type AA, LR6), approx. 16 hrs operating time
<b>WEIGHT</b>	1.4 kg
<b>DIMENSIONS</b>	120 x 190 x 120 mm (W x H x D)

### 1H 2V 1D



Stable metal base with vernier adjustment



Illuminated vial for pre-adjustment



High-quality external Quick-Charger

ARTICLE	ARTICLE NO	EAN-CODE	PU
AutoCross-Laser 3C Pro	031.212L	4 021563 694358	1



**AutoCross-Laser 3C Pro**  
including Sortimo® L-BOXX® 136  
+ tripod adapter  
+ laser enhancement glasses  
+ rubber caps  
+ quick charger  
+ rechargeable batteries

**Packing dimension** (W x H x D)  
442 x 151 x 357 mm