



MasterCross-Laser 360

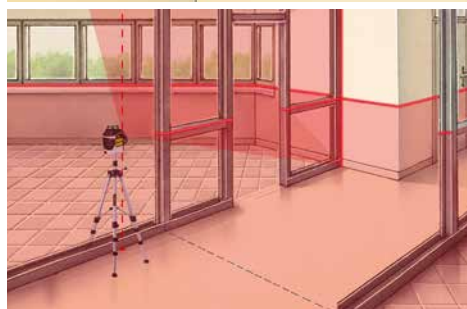

Cross-line laser with horizontal 360° laser circle, plumb function and integrated hand-held receiver mode

Rev.1116

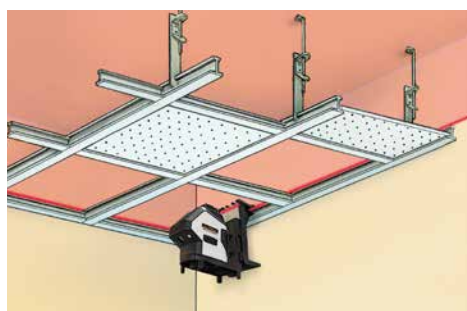


- **PowerBright-Laser:** Special high-performance laser diodes project extremely visible laser lines.
- The **horizontal laser line** produces a continuous 360° laser line, the **vertical laser line** is oriented at right angles thereto. Ideal for almost any alignment job.
- Additional plumb laser at top and bottom
- With the **magnetic clamp and wall bracket** the device can be used as a standalone unit, in a combination as well as in horizontal and vertical position.
- Ideal for mounting horizontally and vertically on **drywall construction profiles**.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Tilt mode is an additional feature** that permits gradients to be laid out.
- **Individually switchable** laser lines and plumb laser
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 40 m radius – ideal for all interior and exterior applications.
- **Transport lock:** A pendulum lock protects unit during transport.

TECHNICAL DATA

| |
|---|
| ACCURACY ± 0,2 mm / m |
| SELF-LEVELLING RANGE ± 3° |
| OPERATING RANGE (depending on room illumination) 20 m |
| LEVELLING automatic |
| LASER WAVELENGTH 635 nm |
| LASER CLASS 2 / < 1 mW |
| POWER SUPPLY 4 x 1,5V type AA, approx. 12 hrs operating time |
| WORKING TEMPERATURE 0°C ... +50°C |
| STORAGE TEMPERATURE -10°C ... +70°C |
| WEIGHT MCL 360 incl. batteries 550 g (without wall bracket) |
| DIMENSIONS MCL 360 62 x 114 x 119 mm (W x H x D) |


1H360° 1V 2P



Additional plumb laser at top and bottom



Height and position of the measuring device easily adjustable



For mounting horizontally and vertically



MasterCross-Laser 360
including carrying case
+ clamp and wall bracket
+ batteries

Packing dimension (W x H x D)
340 x 275 x 123 mm

| ARTICLE | ARTICLE NO | EAN-CODE | PU |
|-----------------------|------------|-----------------|----|
| MasterCross-Laser 360 | 031.380A | 4 021563 699117 | 1 |

